


63 31 023 Removing and installing/replacing footwell light (on floor trim panel, rear)

Lever out lens cover (1) on opening in direction of arrow.

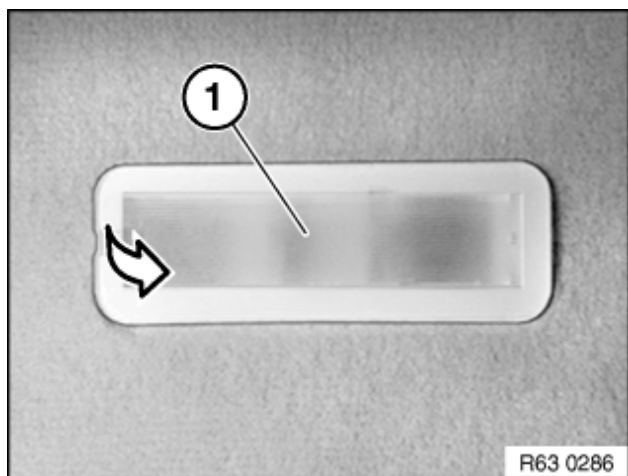

Lever out bulb (1).

Note:

Do not touch glass part of bulb with bare fingers. Only touch bulb on its base or with a clean cloth or packaging of light bulb.

[Note type of bulb.](#)

Release nuts (2) and remove footwell light (3).
Disconnect plug connection.

